

NEW

KCE-1530D

VANDAL IR Dome Camera with Built-in DC Varifocal Lens



- 1/3" Sony Super HAD II CCD
- 0.0002 Lux at F1.2
- High Resolution 600TV Lines
- 2.8~12mm DC Auto Iris Varifocal Lens.
- Built-in 30pcs IR LED
- 3-Axis Mounting Capabilities
- OSD Menu & Second BNC Output
- True Day & Night ICR Filter
- Waterproof IP66 Rated
- Dual Voltage




Specification

DESCRIPTION	NTSC	PAL
Image Sensor	1/3" SONY Super HAD II CCD	
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Horizontal Resolution	600TV Lines	
Video Output	CVBS : 1.0Vp-p, 75Ω composite	
S/N (Y Signal)	50dB (AGC off)	
Min. Illumination	0.0002Lux at F1.2 (Sens-up x256)	
OSD	Built-in	
IRIS Adjustment	DC / MANUAL	
LENS	2.8~12mm DC Auto Iris Varifocal Lens(ICR Type)	
Electronic Shutter	FIXED/MANUAL/FLK/ Auto(1/60~1/100,000sec)	FIXED/MANUAL/FLK/ Auto(1/50~1/100,000sec)
Backlight Compensation	BLC/HSBLC/D-WDR	
Auto Gain Control	ON/OFF(0~255 Level)	
White Balance	ATW/AWB/FIXED/MANUAL	
Mirror	OFF/MIRROR/V-FLIP/ROTATE	
Day&Night	AUTO / B/W / COLOR	
Privacy	ON/OFF (4 Area)	
Gamma	0.45(0.05~1.00)	
Language	ENGLISH / 한국어 / 汉语 / 漢語 / 日本語	
Adjust	CONTRAST/SHARPNESS/CB-GAIN/CR-GAIN	
IR LED	30 EA	
Input Voltage	DC 12V(±10%) / AC 24V	
Power Consumption	IR OFF : 150mA(max) / IR ON : 550mA at DC 12V POWER IR OFF : 70mA(max) / IR ON : 350mA at AC 24V POWER	
Operating Temp. / Hum.	-10°C~ +50°C / 30% ~ 80% RH	
Storage Temp. / Hum.	-20°C ~ +60°C / 20% ~ 90% RH	

Dimension

Unit : mm

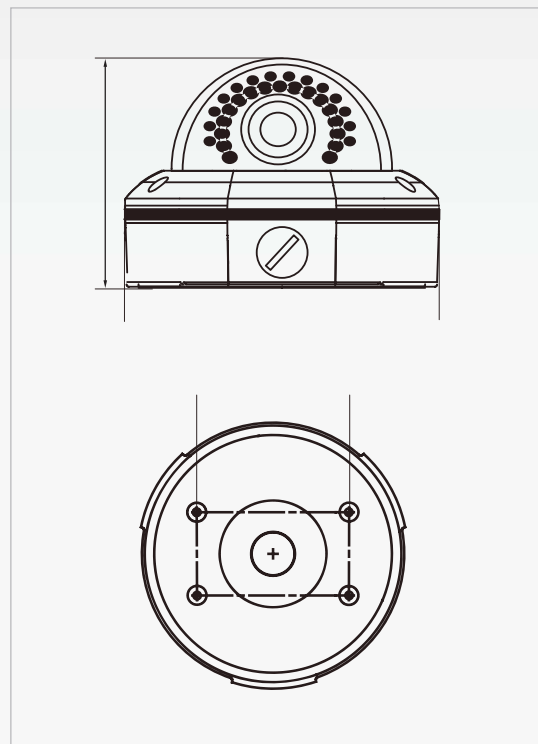

COLOR